

Biomathematical Analysis On the Error of 3D Printing During Covid-19 Pandemic

Bin Zhao^{1*}, Xia Jiang²

¹School of Science, Hubei University of Technology, Wuhan, Hubei, China,

²Hospital, Hubei University of Technology, Wuhan, Hubei, China

*Corresponding Author: Dr. Bin Zhao, School of Science, Hubei University of Technology, Wuhan, Hubei, China

E-mail: zhaobin835@nwsuaf.edu.cn

Received: 10-March-2022, Manuscript no. aeb-22-76796 ; Editor assigned: 12-March-2022, Pre QC no. aeb-22-76796 (PQ);

Reviewed: 17-March-2022, QC no. aeb-22-76796 (Q); Revised: 18-March-2022, Manuscript no. aeb-22-76796 (R); Published: 24-March-2022

ABSTRACT

3D printing technology brings vitality to the innovation of design and is a demonstration of the integration of science and art innovation in industrial design. In this paper, the control range of different types of printers on the accuracy of toy product parts is studied, and the accuracy of the specified types of machines is judged by the calculation and analysis of test data and comparison. By realizing 3D printing combined with industrial design practice, the innovative use of 3D printing technology and art provides a scientific reference for the improvement of the manufacturing level of the basic disciplines of industrial design during the COVID-19 pandemic.

Keywords: 3D printing; Building block toys; Design practice; Precision analysis; Industrial manufacturing

INTRODUCTION

The development of 3D printing technology has revolutionized the future of manufacturing, where the shape and structural design of specific types of toy products are not constrained by traditional manufacturing processes; designs can be made into realistic products from conceptual solutions by 3D printing equipment, thus greatly improving the efficiency of design simulation. Block toys are usually cubic wooden or plastic solid toys (Figure 1), which allow for different arrangements or construction activities, and blocks come in various styles, which have a great role in children's intellectual development during the COVID-19 pandemic [1,2].



Figure 1. Block toys

The new manufacturing technology, represented by 3D printing technology, provides a new direction for the transformation of the traditional manufacturing model. There are two different types of 3D printers (Figure 2) with different accuracy for parts processing, and experiments and analysis are needed to confirm the optimal choice of the printer as the designated processing.



Figure 2. Two different types of 3D printers

Importance of the Problem

To pass on the traditional toy culture to the next generation in a more reasonable way, it is imperative to adopt a fun and enlightening approach to guide and cultivate this group's psychological characteristics [3,4].

Children and adolescents can perceive, understand, and master a series of knowledge and skills related to this craft through the manipulation of such toys.

Based on the collation and comparison of experimental data, analysis of 3D printing processing on the error brought about by the degree of accuracy of product parts, the trend of design groundedness will break the limited manufacturing level of the previous design team, the design studio organization processing, analysis of parts more free and reliable.

In the manufacturing process, if the amount of consumables is equal to the amount estimated at the time of design, then there will be no waste. This not only benefits the environment but also saves the manufacturer's production costs.

Relevant Scholarship

3D printing technology refers to the computer-controlled stacking of materials such as metal, plastic, ceramics, resin, wax, paper, sand, etc. Using specific machines, the printed materials are stacked layer by layer in a layer-by-layer fashion, eventually printing the 3D model in the computer as a physical object [5].

There are already innovative methods of research based on existing technologies regarding the personalized design of products. Analysis of printer error accuracy enables the optimization of models, such as parametric design, which plays an important role in 3D printing.

Parametric as a new design thinking and design style should establish a deeper interaction between object and user through some kind of demand.

In the process of collaborative development and collaborative innovation design of new products, 3D printing technology has diverse features such as low cost, low risk, short cycle time, and fast adjustment. The calculation of the accuracy and effect of different models can greatly improve production efficiency, and such research methods have a great impact on 3D printing [6].

Relevant Scholarship

Based on the questions posed in this paper and the analysis of the problems above, we make the following assumptions.

- There will be no other external factors in the printing device that will affect our calculations.
- The error of the dimensional result of the part measurement will not be greater than 0.1mm.
- The accuracy of the measurement is only based on the length of the same index, and other dimensions are not considered.

METHODS

Dimensional measurements of the models processed by different printers were performed to compare the error fluctuations of the prototypes produced by the two machines using mathematical statistics. A printed block product part was formulated (Figure 3), assuming that a single part needs to meet the assembly requirement of 20mm total length, and noting Shape1 as machine A and Shape1 HD as machine B. First, the same part was processed from both 3D printers using the same raw material under equal conditions, with 20 copies printed from each machine, and a 95% confidence interval was calculated for taking the average part length of 20mm [7-9].



Figure 3. Intentional drawing of the printed part

Acquisition of samples

Measure and organize the dimensional data (Table 1), (Table 2), assuming that the data for the length of the toy part printed by these two printers are known to match $X \sim N(\mu, \sigma^2)$.

Table 1: Measured length values of parts processed by A printer.

Measured length values of parts processed by A printer									
19.5 mm	20.5 mm	20.3 mm	22.2 mm	20.6 mm	20.1 mm	22.1 mm	19.8 mm	21.7 mm	20.5 mm
19.1 mm	21.5 mm	20.9 mm	20.8 mm	22 mm	20.2 mm	20.8 mm	21.9 mm	19.7 mm	20.9 mm

Table 2: Measured length values of parts processed by B printer.

Measured length values of parts processed by B printer									
20.4 mm	20.5 mm	20.9 mm	20.3 mm	21.1 mm	20.5 mm	19.8 mm	20.8 mm	21.3 mm	20.6 mm
20.6 mm	21 mm	19.6 mm	19.8 mm	20.1 mm	20 mm	20.5 mm	21.4 mm	19.9 mm	20.8 mm

Description of data collation

The two sets of data from the measurements were analyzed and processed separately in spss software (Figure 4).The output of the statistical data in spss software (Figure 5).

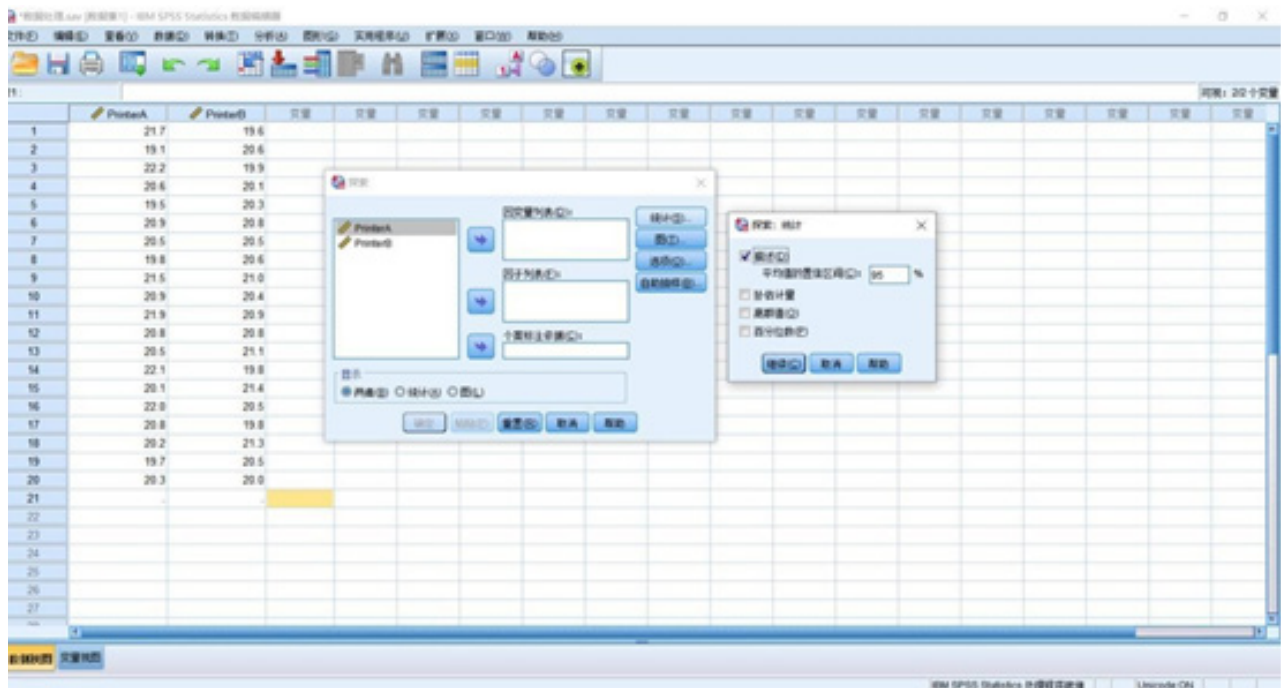


Figure 4. Data entry

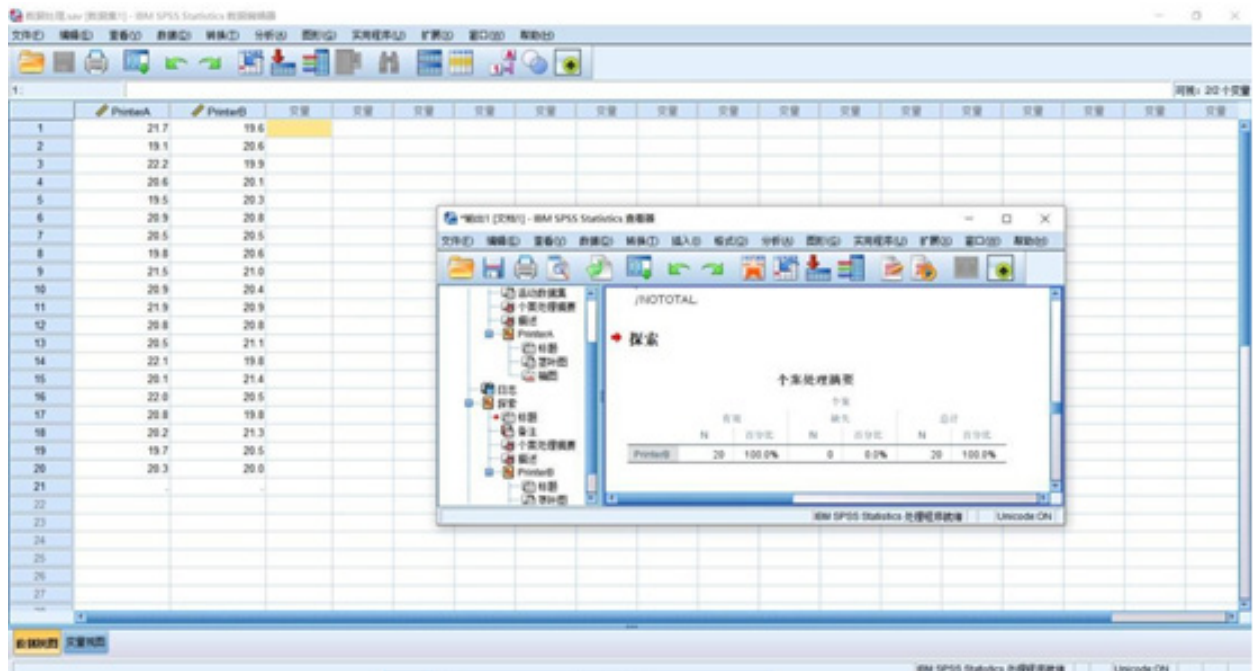


Figure 5. Output of data.

RESULTS

Organizing data

After the software has crunched the data, the following results are listed (Tables 3 and Table 4).

Table 3. Statistics of the parts produced by printer A

		Statistic	Std. Error
Size	Mean	20.755	0.2032
	Median	20.7	
	Variance	0.826	
	Std. Deviation	0.9087	
	Minimum	19.1	
	Maximum	22.2	
	Range	3.1	
	Interquartile Range	1.5	
	Skewness	0.078	0.512
Kurtosis	-0.865	0.992	

Table 4. Statistics of the parts produced by printer B

		Statistic	Std. Error
Size	Mean	20.495	0.115
	Median	20.5	
	Variance	0.265	
	Std. Deviation	0.5145	
	Minimum	19.6	
	Maximum	21.4	
	Range	1.8	
	Interquartile Range	0.9	
	Skewness	0.022	0.512
Kurtosis	-0.803	0.992	

Data processing and calculation

Data for Group A: Taking the 95% confidence interval of the mean length of the part calculate:

$$1 - \alpha = 0.95, \alpha = 0.05, \alpha / 2 = 0.025, n = 20$$

$$(\underline{\mu}, \bar{\mu}) = (\bar{x} - \delta, \bar{x} + \delta), \quad \delta = t_{0.025}(n-1) \frac{s}{\sqrt{n}}$$

Calculated from the above spss software: s=0.5145,

$$t_{0.025}(19) = 2.0930,$$

$$\delta = t_{0.025}(n-1) \frac{s}{\sqrt{n}} = 2.0930 \times \frac{0.9087}{\sqrt{20}} = 0.425$$

$$(\underline{\mu}, \bar{\mu}) = (20.755 - 0.425, 20.755 + 0.425) = (20.330, 21.180)$$

Data for Group B: Taking the 95% confidence interval of the mean length of the part calculate:

$$1 - \alpha = 0.95, \alpha = 0.05, \alpha / 2 = 0.025, n = 20$$

$$(\underline{\mu}, \bar{\mu}) = (\bar{x} - \delta, \bar{x} + \delta), \quad \delta = t_{0.025}(n-1) \frac{s}{\sqrt{n}}$$

Calculated from the above spss software: s=1.9843,

$$t_{0.025}(19) = 2.0930,$$

$$\delta = t_{0.025}(n-1) \frac{s}{\sqrt{n}} = 2.0930 \times \frac{0.5145}{\sqrt{20}} = 0.241$$

$$(\underline{\mu}, \bar{\mu}) = (20.495 - 0.241, 20.495 + 0.241) = (20.254, 20.736)$$

Results of the analysis and corrections

After comparing the results of the analysis of the two sets of data, the 95% confidence interval of the mean length of the parts was calculated as (20.330, 21.180) for group A and (20.254, 20.736) for group B. It was judged that printer B was more accurate than printer A. To ensure that the experimental results are more accurate, the experiment can be repeated several times and the average of each data can be judged again, which in turn can make the data results more convincing.

Model Evaluation and Extension

This validation uses an algorithm that calculates confidence intervals by comparing the interval ranges of two groups of sizes, and the smaller interval range group is determined to be more accurate. In addition, a hypothesis test can be performed by setting $(X_1, X_2, \dots, X_{n_1})$ a sample from printer group A, $(Y_1, Y_2, \dots, Y_{n_2})$ as a sample from printer group B. Since $X \sim N(\mu_1, \delta_1^2)$ and $Y \sim N(\mu_2, \delta_2^2)$ are independent and conform to the F-distribution property, the results of the statistics are as follows:

$$T = \frac{\eta_1 S_1^2 (\eta_2 - 1) \delta_2^2}{\eta_2 S_2^2 (\eta_1 - 1) \delta_1^2} = \frac{S_1^2 \delta_2^2}{S_2^2 \delta_1^2} \sim (\eta_1 - 1, \eta_2 - 1)$$

where S_1^2 and S_2^2 are known by the previous SPSS calculation, and comparing the difference between δ_1^2 and δ_2^2 can also make a judgment on the results.

DISCUSSION

The future of 3D printing technology not only fundamentally changes the modern manufacturing model that has lasted for nearly a century, but also affects every aspect of the design field from the deepest level, and future designers will no longer have their imagination sealed in the cage of the product processing process, and designers' imagination and creativity will be stimulated as never before [10].

Independent designers can rely on 3D printing technology to turn their ideas into real products, thus giving rise to a large number of independent designers and design brands. The trend of socialization of design will break the rigid structure of the previous design organization, and designers will be able to judge the specifications of prototypes more easily so that the design will be more deeply into all aspects related to people's life and production. The design and manufacture of toys will also be more scientific and rational. This experiment uses toy parts as an example and introduces a method for judging the processing accuracy of 3D printers and comparing equipment errors through the use of mathematical and scientific knowledge, which can play an auxiliary reference role for design research.

The above is the calculation method and verification results of this statistical problem related to the effect inspection in product design, please correct me if there is any deficiency.

CONCLUSION

This experiment uses toy parts as an example and introduces a method for judging the processing accuracy of 3D printers and comparing equipment errors through the use of mathematical and scientific knowledge, which can play an auxiliary reference role for design research.

The above is the calculation method and verification results of this statistical problem related to the effect inspection in product design, please correct me if there is any deficiency.

REFERENCES

1. Jeong, J., et al., Developing parametric design fashion products using 3D printing technology. *Fashion and Textiles*, **2021**.8(1): p. 1-25.
2. Tu, J.C., Zhang, X., and Zhang, X.Y. Basic courses of design major based on the addie model: Shed light on response to social trends and needs. *Sustainability*, **2021**.13(8):p. 4414.
3. Song, Y. Research on Interactive Design in Children's Books. In *7th International Conference on Arts, Design and Contemporary Education (ICADCE 2021)*, **2021**: p. 531-536. Atlantis Press.
4. Barricelli, B.R., Casiraghi, E., and Fogli, D. A survey on digital twin: Definitions, characteristics, applications, and design implications. *IEEE access*, **2019**.7:167653-167671.
5. Liu, G. Science of Human Affairs. *Changsha: Central South University Press*, **2006**.
6. Ji-hai, D.U., Yao-yong, L.E., and Wei-lin, X.U. Design of 5.25 GHz Gilbert Mixer with High Gain and Low Noise. *Microelectronics and Computers*, **2013**.30(9):p. 133-136.
7. Yun-xia, Y.O., Lan, C.H., and Hai-yong, W.A. Radio Frequency Power Amplifier Based on SiGe HBT. *Microelectronics and Computers*. **2014**.31(4): p. 144-147.
8. Xuan, M.A., and Zi-qiang, W.A. Circuit Design for Transmitter System of 10 Gb/s SerDes. *Microelectronics and Computers*, **2014**;31(2):14-17.
9. Yu, Z.H., Ji-hai, D.U., and Shi-chao, X.U. Design of a 3~ 5 GHz LNA with the Function of Both a Single-end Input and Differential Output is Achieved. *Microelectronics and Computers*, **2014**;31(6):103-106.
10. Zhen-zhen, D.O., Ye-bing, G.A. and Yan-bin, L,U. Design of GaAs RF front-end LNA. *Microelectronics and Computers*. **2020**;37(7):16-20.