




Scholars Research Library

Archives of Physics Research, 2017, 8 (2): 01-06

[\(http://www.scholarsresearchlibrary.com/journals/archives-of-physics-research/\)](http://www.scholarsresearchlibrary.com/journals/archives-of-physics-research/)



ISSN 0976-0970  
CODEN (USA): APRRC7

## Flood Evacuation Planning Using Remote Sensing and GIS

Dhruvesh K Mathur<sup>1\*</sup>, Praful M Udani<sup>2</sup>

<sup>1</sup>CU Shah University, Faculty of Sciences (Physics), Wadhwan, Gujarat, India

<sup>2</sup>Sardar Patel University, ISTAR-CVM, Vallabh Vidya Nagar, Gujarat, India

**\*Corresponding Author:** Dhruvesh K Mathur, CU Shah University, Faculty of Sciences (Physics), Wadhwan, Gujarat, India, Tel: 9712703107; E-mail: [dhruvesh\\_8mathur@yahoo.co.in](mailto:dhruvesh_8mathur@yahoo.co.in)

---

### ABSTRACT

Flood is natural phenomenon which brings damage to properties, infrastructures, animals, plants and human lives. Issue of flood involves the emergency response of services related to evacuation relief center and health center facility. GIS and Remote sensing helps to identify suitable relief centers, road network availability and evacuation planning. Evacuation planning is useful at time of disaster for movement of people to a safer location and their return. For evacuation planning shelters are identify from existing schools, colleges. Shelters are not located in normal flood area. Road network is available between relief center and flood area All this information and decision making is done with help of GIS. In this research paper as a case study evacuation planning for villages of Olpad Taluka of Surat are studied. These villages are highly vulnerable for flooding due to flood in Tapi river. Evacuation of people from flooded area to high elevation safe location is necessary. In this research based on resources available, elevation of village area, population density of area is studied. Suitable available shelter is identified which contains necessary facility for hospital, food, rail and road network. These locations are identified and digitized in QGIS software complete evacuation plan is discuss in this paper.

**Keywords:** Remote sensing, GIS, Olpad, Risk zone, Vulnerability, Evacuation planning

---

### INTRODUCTION

India is one in all the foremost flood prone countries within the world. The principal reasons for flood are prevailing natural ecological systems within the country and these are significant precipitation with temporal and spatial variation, extremely silted watercourse systems and inadequate capability to hold the high flood discharge, inadequate drain to hold away the fresh water quickly to streams/rivers. Repeatedly typhoons and cyclones conjointly cause floods. Flash floods are caused by steep and extremely erodible mountains, significantly in range ranges. The average precipitation in India is 1150 millimetre with important variation across the Country. The annual precipitation on the western coast and Western Ghats, Khasi hills and over most of the Brahmaputra River vale amounts to over 2500 mm [1,2]. Most of the floods occur throughout the monsoon amount and are sometimes related to tropical storms, depressions and active monsoon conditions. Because of the mentioned conditions floods occur in the majority watercourse basins in India [2].

Vulnerability to floods and alternative natural disasters is caused by the high population density, widespread poorness, illiteracy, huge pressure on rural land, and agriculture dominated economy. Children, women, old age people are highly vulnerable during disaster. 85% of the deaths throughout disasters are of ladies and kids (Centre for analysis on the medicine of Disasters, CRED 2000). Presently protection within the country against floods is insufficient. Although non-structural measures improve the preparation to floods and scale back losses, the requirement of structural measures would perpetually stay for minimizing the extent of physical harm caused by floods. In future programs and development designing of the country, it's needed to integrate control and management designing alongside global climate change. In Gujarat, Tapi river mostly causes flood in Surat and its nearby areas of Olpad and Chaurasi Talukas. This research is based on use of remote sensing and GIS in flood evacuation. Evacuation planning is most important during flood. Olpad Taluka of Surat is also coastal area and highly vulnerable for flood during cyclone and tsunami. Census based parameters like Population density, resources availability is used for evacuation planning using GIS [3].

## STUDY AREA

Olpad taluka of Surat is chosen as a study space. The study space (Olpad Taluka) is confined by  $20^{\circ} 0' 0''$  to  $21^{\circ} 7' 48''$  north latitude and  $72^{\circ} 22' 48''$  to  $74^{\circ} 13' 48''$  east great circle region in south Gujarat. Throughout the last decade most flood occurrences are discovered in Tapi and also the chosen study area of Olpad taluka of Surat district. Serious rains, abrupt discharge from Ukai reservoir, coinciding with high water in sea, voidance congestion and encroachments in geological formation space have seriously affected coastal taluks and specifically Surat town. The most important flooding has occurred in 1998, 2005, 2006 and 2007.

## RESAERCH METHDOLOGY

For analysis purpose QGIS open source software is used. GIS data base is created based on different data collection, mapping of settlement locations, digitization in QGIS software. Major steps involve in data base creation are.

1. Collection of satellite data like land use, drainage system, district boundary, village boundary, rail and road network, digital elevation model.
2. Collect and analyze data for Elevation, Resources available for flood in villages, Population density of village Distance of village from Tapi river.
3. Based on above available data analysis villages are classified in three different vulnerability zones.
4. For higher vulnerability evacuation planning is done in QGIS software.

Figure 1 below shows different villages of Olpad taluka, Surat. Figure2 shows Cartosat satellite image of Olpad taluka taken from Bhuvan Portal profile length ranges from 0 m to 100 m with station separation 10 m, while the interval between the profile lines is 10 m.



Figure 1 Villages of Olpad Taluka of Surat district



Figure 2 Satellite image of Olpad Taluka (Source-Bhuvan portal)

SRTM DEM of Olpad taluka is downloaded from and values for different regions are computed. Study area is shown in Figure 3.


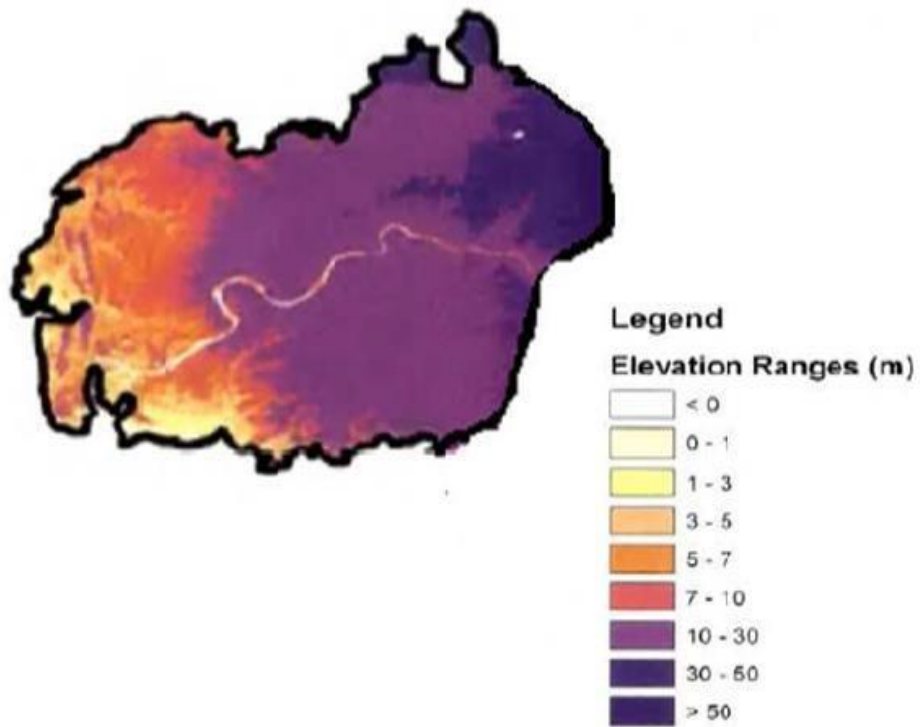


Figure 3 Digital elevation model (Source-SRTM DEM)

Most of the Villages of study area are well connected by roads. Major road network consists of National Highway, State Highway and District Roads. The road network map of Olpad taluka is shown in Figure 4. Based on field observations for every village and available facilities data collected is shown in Figure 5.






Based on QGIS analysis data for elevation, resources available like shelters, road network, population density of villages are computed in software and following classification is done for villages.

**Table 1 Range of risk zone villages**

Higher Risk Zone Villages		Medium Risk Zone Villages		Lower Risk Zone Villages	
Admor,	Mirjapor,	Ambheta,	KasalaKhurd,	Kanad,	Paria,
Ariyana,	Mulad,	Barbodhan,	Kosam,	Karamla,	Mandroi,
Asnabad,	Narthan,	Bhadol,	Kunkni,	Kachhab,	Sandhiyer,
Balkas,	Olpad,	Bhandut,	Kuvad,	Kareli,	Andhi,
Bhagwa,	Orma,	Dandi,	Lavachha,	PardiZankhri,	Kanad,
Delad,	PardiKoba,	Delasa,	Mahamedpor,	Khalipor,	Sondlakhara,
Gothan,	Sarol,	Erthan,	Mor,	Kimamli,	Sithana,
Hathisa,	Saroli,	Isanpur,	Naghoi,	Vaswari,	Obhla,
Jafrabad,	Sarsana,	Jinod,	Nesh,	Veluk,	Sithan,
Kadrama,	Selut,	Kachhol,	Saras,	Vihara,	Syadla,
KaslaBujrang,	Sherdi,	Kamroli,	Sayan,	Thothab,	Takarma,
Kathodra,	Sonsak,	Kanyasi,	Segwasyadla,	Vadoli,	Tena,
Kim,	Umra,	Karanj,		Talad,	
Kudsad,	Umrachhi,				
Masma,					

### Evacuation planning

For evacuation planning of highly vulnerable villages based on available road network and resources available villages are divided in 5 zones. For each zone shelter and health care facility centre which are well connected through road network are identified. In following screen shot for QGIS evacuation planning different road network like national highway, state highway, and village roads are digitized in QGIS software. In Left portion of map clearly indicate different zones prepared for evacuation planning different road network, rail network, rescue and health care centre digitize in QGIS. Decision making and query analysis is shown for particular village in form of query is shown (Figure 6) [4-7].

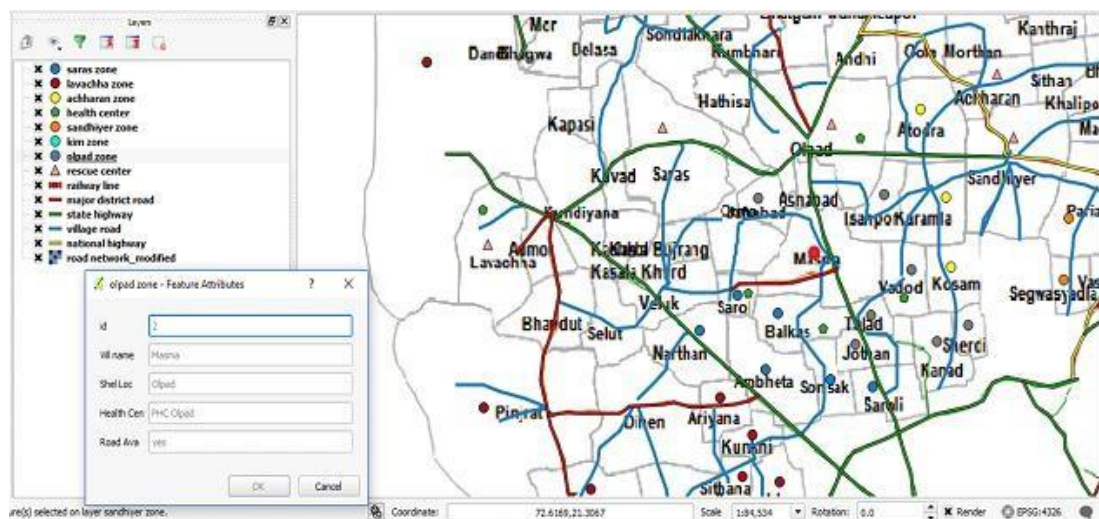

**Figure 6 QGIS decision making for evacuation planning**

### **CONCLUSION**

Remote sensing and GIS are basically used for disaster management and analysis and decision making purpose. Evacuation planning for flood for this study are is demonstrated here. Same methodology also used for other natural and manmade disasters. Census data analysis is very useful with integrate with QGIS for decision making during disaster phase.

### **REFERENCES**

- [1] National Disaster Management guidelines for Management of floods, Govt of India.
- [2] IDRC, ICT, natural resource management and local development, Background paper for the IDRC regional ICT and local development workshop, Working draft, Dakar, May **2009**.
- [3] Gujarat State Disaster Management Authority, An Initiative of Government of Gujarat.
- [4] CRISP, National University of Singapore.
- [5] Gujarat State Disaster Management Plan, June **2014** vol 1, 2.
- [6] Mathur, D., and Udani, PM., Application of GIS and remote sensing technologies in disaster management. In ICGS **2015** conference at GTU-Chandkheda.
- [7] National Weather Service, share your weather story Flood Safety Tips and Resources.